

## PowerPoint PP-S-4t-M24

Artikel-Nr: 7989076




- **Can be combined with most commercial lifting means without additional connecting element.**
- **Double ball bearing** is the optimal solution for turning and flipping operations under full load (not suitable for permanent turning under load).
- **Lifting points pivots 360°.**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL, 90° to the bolt-on direction** Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Marking with requested torque moment and nominal WLL with a safety factor of 4:1 (MRL 2006/42/EG) and 5:1 (ASME B 30.26).
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451017
- Significant product characteristics of the PP-S, PP-B and PP-VIP are subject to property right claims.
- The shape of the hook tip avoids unintentional attachment into small holes and tip loading. Robust, forged safety latch.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## PowerPoint PP-S-4t-M24

Artikel-Nr: 7989076

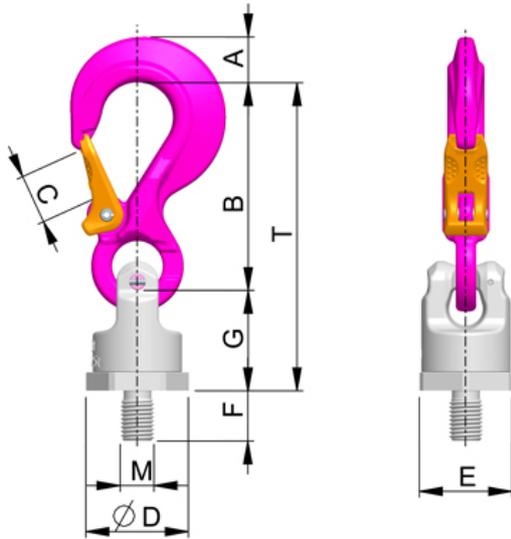

<b>weight</b>	3.50 kg	7.7 lbs
<b>Nominal WLL</b>	4000 kg	8800 lbs
<b>T</b>	227 mm	8-15/16"
<b>A</b>	36 mm	1-13/32"
<b>B</b>	150 mm	5-29/32"
<b>C</b>	35 mm	1-3/8"
<b>D</b>	78 mm	3-1/16"
<b>E</b>	70 mm	2-3/4"
<b>F</b>	36 mm	1-13/32"
<b>G</b>	77 mm	3"
<b>M</b>	M24 mm	M24