

## PowerPoint PP-VIP8-2,5t-M 20X1 with max-length F=30 mm

Artikel-Nr: 8600573




**Universal and non-mix-up clevis connection for chains, hooks and eye.**

- **Double ball bearing** is the optimal solution for turning and flipping operations under full load (not suitable for permanent turning under load).
- **Lifting points pivots 360°.**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL, 90° to the bolt-on direction** Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Marking with requested torque moment and nominal WLL with a safety factor of 4:1 (MRL 2006/42/EG) and 5:1 (ASME B 30.26).
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Significant product characteristics of the PP-S, PP-B and PP-VIP are subject to property right claims.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

PowerPoint PP-VIP8-2,5t-M 20X1 with max-length F=30 mm

Artikel-Nr: 8600573

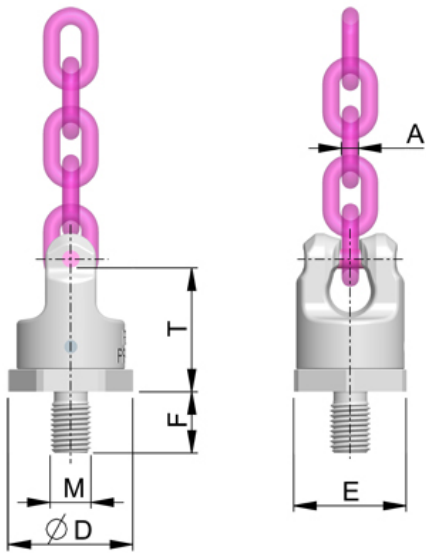

|             |           |          |
|-------------|-----------|----------|
| weight      | 0.93 kg   | 2.05 lbs |
| Nominal WLL | 2500 kg   | 5500 lbs |
| T           | 61 mm     | 2-13/32" |
| A           | 8 mm      | 5/16"    |
| D           | 61 mm     | 2-13/32" |
| E           | 55 mm     | 2-5/32"  |
| F           | 30 mm     | 1-3/16"  |
| M           | M 20X1 mm | M 20X1   |