

PowerPoint PP-S-2,5t-3/4"-10UNC

Artikel-Nr:

8600583




Can be combined with most commercial lifting means without additional connecting element.

- **Double ball bearings** is the optimal solution for turning and flipping operations under full load (not suitable for permanent turning under load).
- **Lifting points pivots 360°.**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL, 90° to the bolt-on direction** Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Marking with requested torque moment and nominal WLL with a safety factor of 4:1 (MRL 2006/42/EG) and 5:1 (ASME B 30.26).
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Significant product characteristics of the PP-S, PP-B and PP-VIP are subject to property right claims.
- The shape of the hook tip avoids unintentional attachment into small holes and tip loading. Robust, forged safety latch.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

PowerPoint PP-S-2,5t-3/4"-10UNC

Artikel-Nr: 8600583

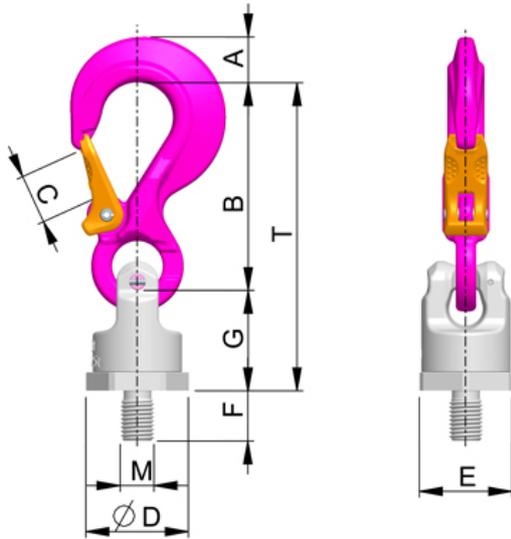

weight	1.7 kg	3.75 lbs
Nominal WLL	2500 kg	5500 lbs
T	187.0 mm	7-3/8"
A	28.0 mm	1-1/8"
B	126.0 mm	4-31/32"
C	30 mm	1-3/16"
D	61 mm	2-13/32"
E	55 mm	2-5/32"
F	30 mm	1-3/16"
G	61 mm	2-13/32"
M	3/4"-10UNC mm	3/4"-10UNC