

Load ring VLBG-Z 5t 1 1/4"-7UNC with variable length

Artikel-Nr:

8600446




Fully captive 100% crack detected hexagon head cap bolts with thread lengths of H= 32-278mm are available. When ordering implicitly indicate the required length.

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as: - Standard Metric Thread (DIN EN 13) - Metric Fine Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1) - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 5t 1 1/4"-7UNC with variable length

Artikel-Nr: 8600446

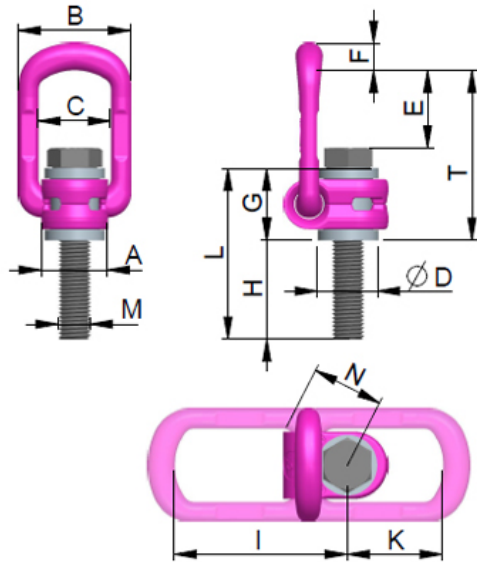

Nominal WLL	5000 kg	11000 lbs
T	147 mm	5-25/32"
A	60 mm	2-3/8"
B	103 mm	4-1/16"
C	65 mm	2-9/16"
D	60 mm	2-3/8"
E	64 mm	2-1/2"
F	22,5 mm	7/8"
G	61 mm	2-13/32"
H	32-278 mm	1-1/4" up to 10-
I	151 mm	5-15/16"
K	80 mm	3-1/8"
L	93-339 mm	3-21/32" up to 13-
M	1 1/4"-7UNC mm	1 1/4"-7UNC
N	67 mm	2-5/8"