

Load ring VLBG-Z 1,5t 5/8"-18UNF with bolt

Artikel-Nr: 7903942




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
 - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 1,5t 5/8"-18UNF with bolt

Artikel-Nr: 7903942

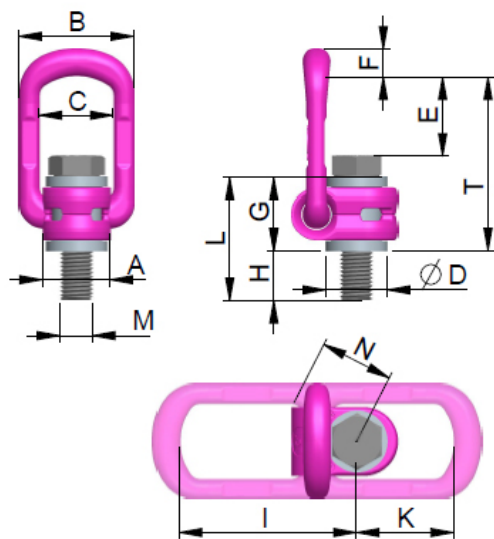

weight	0.57 kg	1.26 lbs
Nominal WLL	1500 kg	3300 lbs
T	85 mm	3-11/32"
A	33 mm	1-5/16"
B	56 mm	2-3/16"
C	36 mm	1-27/64"
D	46 mm	1-13/16"
E	38 mm	1-1/2"
F	13,5 mm	17/32"
G	36 mm	1-27/64"
H	30 mm	1-3/16"
I	87 mm	3-7/16"
K	47 mm	1-7/8"
L	60 mm	2-3/8"
M	5/8"-18UNF mm	5/8"-18UNF
N	38 mm	1-1/2"