

## Vario-Starpoint VRS-F-M6 with star key

Artikel-Nr: 7900906




- Lifting points pivots 360°. Easy adjustment in load direction.
- Not exchangeable RUD-Bolt (this reduces the usage of improper standard bolts).
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart / product information).
- Clear marking at the bolt head: RUD, thread size, batch-no.
- Variable bolt lengths available for tapped or through holes.
- Available as: – Standard Metric Thread (DIN EN 13) – Metric Fine Thread (DIN EN 13) – Coarse Pitch Thread UNC (ANSI B1.1) – Fine Thread 8UN (ANSI B1.1) – Inch Pipe Thread (DIN 228)
- Significant product characteristics of the VRS are subject to property right claims.
- Tested and certified by DGUV. Testing specifications: GS-OA-15-04:2012-05 Certificate No.: OA OA 1451015
- Complying with the US-Standard (ASME B30.26). Quick and easy installation with just one bolt connection.
- Installation and disassembly without any further tools than the exchangeable Easy-Fit star profile key for singular lifts.
- For permanent installation and recurrent lifts we can offer a special socket wrench to apply the requested torque (fits to a common Inch torque wrench).

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Vario-Starpoint VRS-F-M6 with star key

Artikel-Nr: 7900906

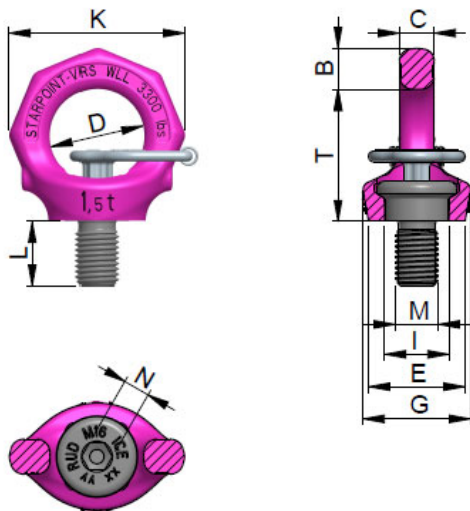

|                    |         |          |
|--------------------|---------|----------|
| <b>weight</b>      | 0.07 kg | 0.15 lbs |
| <b>Nominal WLL</b> | 100 kg  | 220 lbs  |
| <b>T</b>           | 28 mm   | 1-1/8"   |
| <b>B</b>           | 9 mm    | 11/32"   |
| <b>C</b>           | 7 mm    | 9/32"    |
| <b>D</b>           | 20 mm   | 3/4"     |
| <b>E</b>           | 23 mm   | 29/32"   |
| <b>G</b>           | 28 mm   | 1-1/8"   |
| <b>I</b>           | 13 mm   | 1/2"     |
| <b>K</b>           | 37 mm   | 1-7/16"  |
| <b>L</b>           | 9 mm    | 11/32"   |
| <b>M</b>           | M 6 mm  | M 6      |
| <b>N</b>           | 6 mm    | 15/64"   |