

## Vario-Starpoint VRS-F-M33 with star key

Artikel-Nr: 7993439




- Lifting points pivots 360°. Easy adjustment in load direction.
- Not exchangeable RUD-Bolt (this reduces the usage of improper standard bolts).
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart / product information).
- Clear marking at the bolt head: RUD, thread size, batch-no.
- Variable bolt lengths available for tapped or through holes.
- Available as: – Standard Metric Thread (DIN EN 13) – Metric Fine Thread (DIN EN 13) – Coarse Pitch Thread UNC (ANSI B1.1) – Fine Thread 8UN (ANSI B1.1) – Inch Pipe Thread (DIN 228)
- Significant product characteristics of the VRS are subject to property right claims.
- Tested and certified by DGUV. Testing specifications: GS-OA-15-04:2012-05 Certificate No.: OA OA 1451015
- Complying with the US-Standard (ASME B30.26). Quick and easy installation with just one bolt connection.
- Installation and disassembly without any further tools than the exchangeable Easy-Fit star profile key for singular lifts.
- For permanent installation and recurrent lifts we can offer a special socket wrench to apply the requested torque (fits to a common Inch torque wrench).

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Vario-Starpoint VRS-F-M33 with star key

Artikel-Nr: 7993439

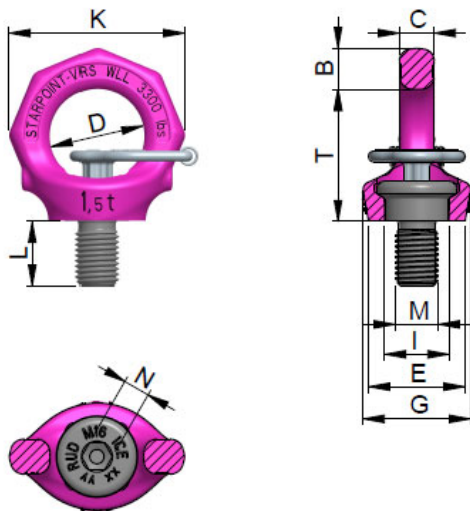

|                    |         |          |
|--------------------|---------|----------|
| <b>weight</b>      | 2.20 kg | 4.85 lbs |
| <b>Nominal WLL</b> | 4500 kg | 9920 lbs |
| <b>T</b>           | 87 mm   | 3-7/16"  |
| <b>B</b>           | 26 mm   | 1"       |
| <b>C</b>           | 24 mm   | 15/16"   |
| <b>D</b>           | 60 mm   | 2-3/8"   |
| <b>E</b>           | 66 mm   | 2-5/8"   |
| <b>G</b>           | 75 mm   | 2-15/16" |
| <b>I</b>           | 44 mm   | 1-3/4"   |
| <b>K</b>           | 114 mm  | 4-1/2"   |
| <b>L</b>           | 45 mm   | 1-25/32" |
| <b>M</b>           | M33 mm  | M33      |
| <b>N</b>           | 17 mm   | 43/64"   |