

Eye Plate for bolting RBG-3

Artikel-Nr: 51817





Load ring threaded with full working load in all directions and split force introduction.

- Split force introduction due to multiple point fixing.
- Suspension ring pivots 180°.
- 100% WLL at 90 degrees in the load ring plane possible.
- Clear marking of the minimum WLL for all loading directions.
- Original RUD bolt available as spare part.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye Plate for bolting RBG-3

Artikel-Nr: 51817

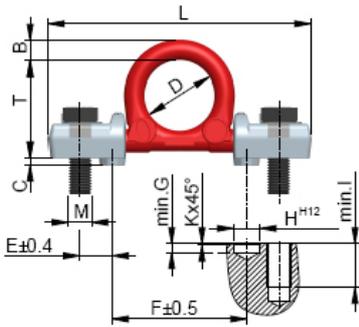

	weight	1.07 kg	2.36 lbs
	Nominal WLL	3000 kg	6600 lbs
T		67 mm	2-5/8"
A		34 mm	1-11/32"
B		16 mm	5/8"
C		5 mm	13/64"
D		48 mm	1-7/8"
E		22 mm	7/8"
F		92 mm	3-5/8"
G		6 mm	15/64"
H		18 mm	23/32"
I		30 mm	1-3/16"
K		1 mm	3/64"
L		178 mm	7"
M		M16 mm	M16
N		71 mm	2-13/16"