

Eye nut RM - M36

Artikel-Nr: 53093




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye nut RM - M36

Artikel-Nr: 53093

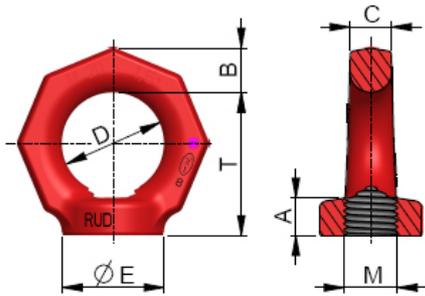

weight	5.80 kg	12.79 lbs
Nominal WLL	4000 kg	8800 lbs
T	130 mm	5-1/8"
A	37 mm	1-7/16"
B	43 mm	1-11/16"
C	38 mm	1-1/2"
D	90 mm	3-17/32"
E	100 mm	3-15/16"
M	M36 mm	M36