

Eye nut RM - M39

Artikel-Nr: 7904790




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye nut RM - M39

Artikel-Nr: 7904790

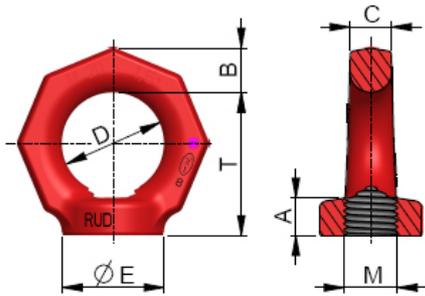

weight	5.65 kg	12.46 lbs
Nominal WLL	5000 kg	11000 lbs
T	130 mm	5-1/8"
A	37 mm	1-7/16"
B	43 mm	1-11/16"
C	38 mm	1-1/2"
D	90 mm	3-17/32"
E	100 mm	3-15/16"
M	M39 mm	M39