

Eye nut RM - M42

Artikel-Nr: 53095




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye nut RM - M42

Artikel-Nr: 53095

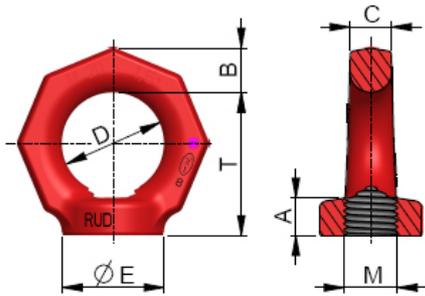

weight	5.50 kg	12.13 lbs
Nominal WLL	6000 kg	13200 lbs
T	130 mm	5-1/8"
A	37 mm	1-7/16"
B	43 mm	1-11/16"
C	38 mm	1-1/2"
D	90 mm	3-17/32"
E	100 mm	3-15/16"
M	M42 mm	M42