

Eye nut RM - M48

Artikel-Nr: 53098




For the RUD RM - eye nuts, the threaded connector component must be of at least quality grade 8.8

- Considerably higher WLL (in comparison to DIN 582) at vertical load.
- Large thread and WLL range (M6-M48, 0.1 t – 8 t).
- Clear marking of the minimum WLL for all loading directions.
- Quick and easy installation with just one bolt connection.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Eye nut RM - M48

Artikel-Nr: 53098

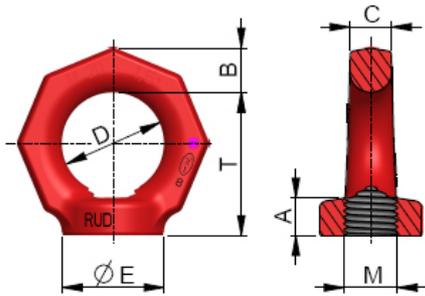

weight	5.30 kg	11.68 lbs
Nominal WLL	8000 kg	17600 lbs
T	130 mm	5-1/8"
A	37 mm	1-7/16"
B	43 mm	1-11/16"
C	38 mm	1-1/2"
D	90 mm	3-17/32"
E	100 mm	3-15/16"
M	M48 mm	M48