

VLBS-U-LT 4t - Load ring welded for low temperature -45°C

Artikel-Nr: 7903400




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 8 + a 3
- The weld-on-block is made (forged) out of a good weldable steel.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

VLBS-U-LT 4t - Load ring welded for low temperature -45°C

Artikel-Nr: 7903400

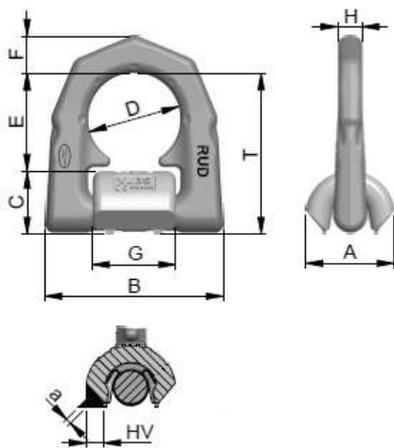

| | | |
|--------------------|---------|----------|
| weight | 0.72 kg | 1.59 lbs |
| Nominal WLL | 4000 kg | 8800 lbs |
| T | 83 mm | 3-1/4" |
| A | 42 mm | 1-21/32" |
| B | 87 mm | 3-7/16" |
| C | 31 mm | 1-7/32" |
| D | 51 mm | 2" |
| E | 52 mm | 2-1/16" |
| F | 18 mm | 23/32" |
| G | 46 mm | 1-13/16" |
| H | 16 mm | 5/8" |