

## Excavator hook welded VABH-W 1,5t

Artikel-Nr: 7991208




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- Material of weld-on-block 1.6541 (23MnNiCrMo52) Weld: Kehlnaht 4 (please observe user instruction).
- Area of application in ring plane: 150°, Area of application at lateral load: +45°, -45°

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Excavator hook welded VABH-W 1,5t

Artikel-Nr: 7991208

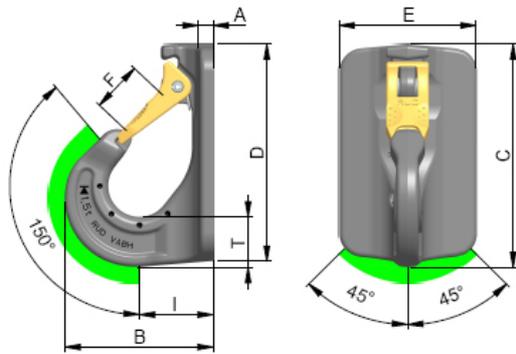

<b>weight</b>	0.80 kg	1.76 lbs
<b>Nominal WLL</b>	1500 kg	3300 lbs
<b>T</b>	20 mm	3/4"
<b>A</b>	7,5 mm	11/32"
<b>B</b>	78 mm	3-1/16"
<b>C</b>	117 mm	4-5/8"
<b>D</b>	111 mm	4-13/32"
<b>E</b>	70 mm	2-3/4"
<b>F</b>	25 mm	63/64"
<b>I</b>	38 mm	1-1/2"