

## Excavator hook welded VABH-W 2,5t

Artikel-Nr: 7991209




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- Material of weld-on-block 1.6541 (23MnNiCrMo52) Weld: Kehlnaht 5 (please observe user instruction).
- Area of application in ring plane: 150°, Area of application at lateral load: +45°, -45°

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Excavator hook welded VABH-W 2,5t

Artikel-Nr: 7991209

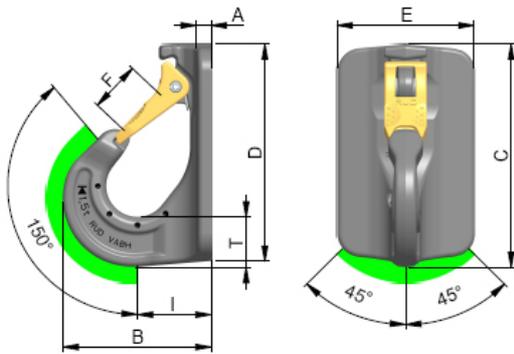

<b>weight</b>	1.80 kg	3.97 lbs
<b>Nominal WLL</b>	2500 kg	5500 lbs
<b>T</b>	28 mm	1-1/8"
<b>A</b>	8,5 mm	11/32"
<b>B</b>	101 mm	3-31/32"
<b>C</b>	148 mm	5-13/16"
<b>D</b>	143 mm	5-5/8"
<b>E</b>	85 mm	3-11/32"
<b>F</b>	30 mm	1-3/16"
<b>I</b>	49 mm	1-15/16"