

## Excavator hook welded VABH-W 4t

Artikel-Nr: 7991210




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- Material of weld-on-block 1.6541 (23MnNiCrMo52) Weld: Kehlnaht 6 (please observe user instruction).
- Area of application in ring plane: 150°, Area of application at lateral load: +45°, -45°

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Excavator hook welded VABH-W 4t

Artikel-Nr: 7991210

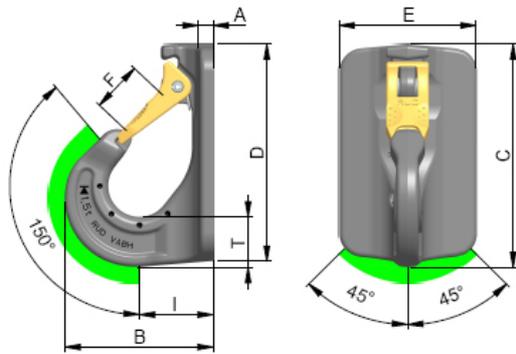

<b>weight</b>	3.12 kg	6.88 lbs
<b>Nominal WLL</b>	4000 kg	8800 lbs
<b>T</b>	36 mm	1-27/64"
<b>A</b>	11 mm	7/16"
<b>B</b>	122 mm	4-13/16"
<b>C</b>	171 mm	6-3/4"
<b>D</b>	164 mm	6-15/32"
<b>E</b>	104 mm	4-3/32"
<b>F</b>	35 mm	1-3/8"
<b>I</b>	59 mm	2-15/16"