

## ICE-Foundry Hook IWH 10


Artikel-Nr: 7903847



Often referred to as the container hook. Considerably larger mouth width than ISH but without a safety latch. Use only where unintentional unhooking is impossible. Inappropriate for overhead lifting! When using foundry hooks, special attention must be paid and a risk assessment must be carried out before using. Robust cross section (SizeC/G) is resistant against increased lateral forces. Specially designed wearing edges to protect the chain link, compare the dimension "E". Gauge marks for measuring the width of the hook opening. Connecting bolt and tensioning sleeve are pre-assembled. ICE-Foundry Hook is marked by the RUD-ID-TAG<sup>®</sup> (RFID chip) and with the clear identification number distinguished.

## ICE-Foundry Hook IWH 10

Artikel-Nr: 7903847

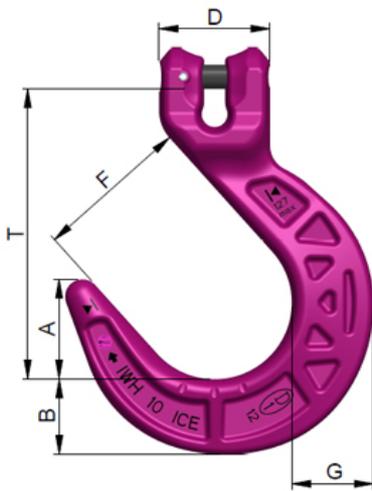

<b>weight</b>	3.01 kg	6.64 lbs
<b>Nominal WLL</b>	5000 kg	11000 lbs
<b>T</b>	169 mm	6-21/32"
<b>A</b>	58 mm	2-9/32"
<b>B</b>	44 mm	1-3/4"
<b>C</b>	31 mm	1-7/32"
<b>D</b>	64 mm	2-1/2"
<b>E</b>	46 mm	1-13/16"
<b>F</b>	90 mm	3-17/32"
<b>G</b>	47 mm	1-7/8"