

## PSA-STARPOINT PSA-VRS 5/8"-11UNC

Artikel-Nr: 7998659




- **Lifting points pivots 360°**
- **They are corresponding to a "anchor point" according to European edict 2016/425** and the DIN 795:2012-10 resp. DIN CEN / TS 16415:2013-4 and they are marked with CE and the number of load bearing persons (=1 or 2 persons).
- **These products are certified by a notified institution of DGUV** (Deutsche Gesetzliche Unfallversicherung): DGUV-test certificate No.: PS17060031, PS17060032 and PS17060033 with the evidence of the in OSHA 1926.502: 2001/01 paragraph (d)(15) and DIN EN 50308:2005 chapter 4.5 for lifting points required Forces.
- **Non removable special bolt** (this reduces the risk of improper standard bolts).
- Available as: - Standard Metric Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1)
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## PSA-STARPOINT PSA-VRS 5/8"-11UNC

Artikel-Nr: 7998659

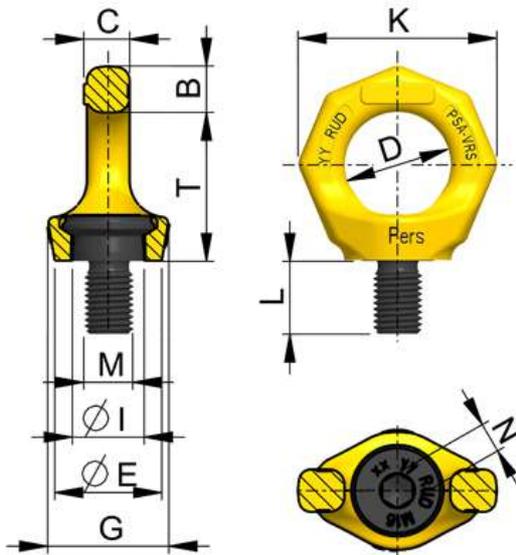

	weight	0.32 kg	0.71 lbs
<b>T</b>	50 mm	1-31/32"	
<b>B</b>	16 mm	5/8"	
<b>C</b>	15 mm	19/32"	
<b>D</b>	35 mm	1-3/8"	
<b>E</b>	35 mm	1-3/8"	
<b>G</b>	40 mm	1-9/16"	
<b>I</b>	24 mm	15/16"	
<b>K</b>	65 mm	2-9/16"	
<b>L</b>	24 mm	15/16"	
<b>M</b>	5/8"-11UNC mm	5/8"-11UNC	
<b>N</b>	3/8" mm	3/8"	