

VIP-Plug-in Connector VERG-6

Artikel-Nr: 8600130



VERG, a plug-in bolt used for transportation or similar lifting purposes, when bores are the specified lifting points available.


Always indicate length L and diameter size D of the plug-in connector when ordering.

- Minimum $\varnothing D = 17 \text{ mm}$
- Maximum $\varnothing D = 48 \text{ mm}$
- Bore diameter = $D + 1 \text{ mm}$
- Minimum bolt length $L = 2 \times D$

For vertical lifting purposes, we recommend that a RUD spreader bar or cross beam be used. Attention: Attach the load as close as possible to the fork head when lifting. VIP-Plug-in connectors are non stock items. Production is subject to customer demand. Bear in mind the respective delivery periods.

VIP-Plug-in Connector VERG-6

Artikel-Nr: 8600130

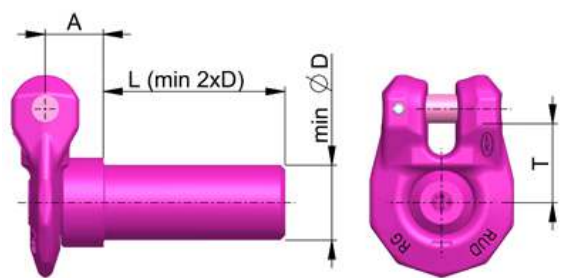

weight	0.0 kg	0.00 lbs
Nominal WLL	1500 kg	3300 lbs
T	20 mm	3/4"
A	11 mm	7/16"
D	17 mm	43/64"