

VIP-Isolatiing-Complete assembly V-SIG-6

Artikel-Nr: 7984258




VIP standard-isolating sling to be used when welding is carried out on suspended loads. Minimises the danger of current flowing through the assembly to the crane. With an intergrated VIP - fork head - Isolating plate which isolates up to a maximum of 1000 V. Max. operating temperature +80°C. Can be used for crane hooks up to number 2.5 DIN 15401.

V-SIG consits of:

- 1x VIP A-link
- 1x 2 chain links
- 1x VIP fork head shackle
- 1x VIP fork head isolating plate
- 1x 2 chain links
- 1x VIP cobra hook

VIP-Isolatiing-Complete assembly V-SIG-6

Artikel-Nr: 7984258

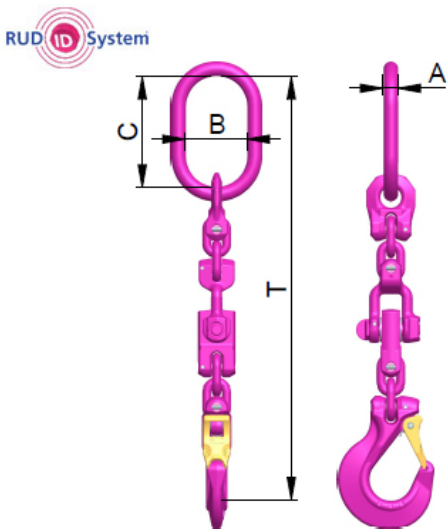

weight	1.40 kg	3.1 lbs
Nominal WLL	1500 kg	3300 lbs
T	350 mm	13-3/4"
A	13 mm	1/2"
B	60 mm	2-3/8"
C	110 mm	4-11/32"