

VIP-Isolatiing-Complete assembly V-SIG-13

Artikel-Nr: 7984261




VIP standard-isolating sling to be used when welding is carried out on suspended loads. Minimises the danger of current flowing through the assembly to the crane. With an intergrated VIP - fork head - Isolating plate which isolates up to a maximum of 1000 V. Max. operating temperature +80°C. Can be used for crane hooks up to number 6 DIN 15401.

V-SIG consits of:

- 1x VIP A-link
- 1x 2 chain links
- 1x VIP fork head shackle
- 1x VIP fork head isolating plate
- 1x 2 chain links
- 1x VIP cobra hook

VIP-Isolatiing-Complete assembly V-SIG-13

Artikel-Nr: 7984261

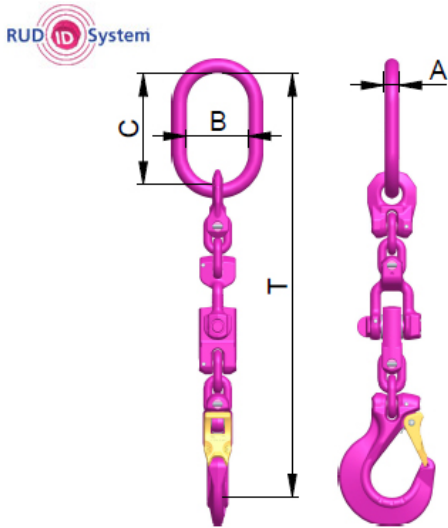

weight	8.20 kg	18.0 lbs
Nominal WLL	6700 kg	15000 lbs
T	632 mm	24-7/8"
A	22 mm	7/8"
B	90 mm	3-17/32"
C	160 mm	6-5/16"