

## VIP-Swivel connector VWA 20

Artikel-Nr: 7990723




With a ball bearing which enables swiveling under load. Can be versatility combined with all VIP components by means of the clevis connection using the adapter link. Insensitive to dirt owing to the sealed body. Connecting bolt and tensioning sleeve are pre-assembled. The BGR 500/DGUV-Regel 100-500 stipulates that lifting means never be used while in a twisted condition. This requirement is automatically met by the VWA because of the integrated ball bearing.

Hint: Install the VWA in such a way that the bending of the adapter link is not possible while in use. Not suitable for permanent use and swiveling under full load. Avoid bending of the appliance.

## VIP-Swivel connector VWA 20

Artikel-Nr: 7990723

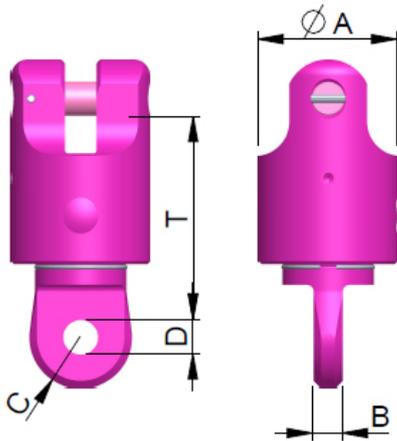

<b>weight</b>	7.28 kg	16.05 lbs
<b>Nominal WLL</b>	16000 kg	35300 lbs
<b>T</b>	147 mm	5-25/32"
<b>A</b>	100 mm	3-15/16"
<b>B</b>	21 mm	13/16"
<b>C</b>	37 mm	1-7/16"
<b>D</b>	25 mm	63/64"