

## VIP-Swivel connector VWA 22

Artikel-Nr: 7100634




With a ball bearing which enables swiveling under load. Can be versatility combined with all VIP components by means of the clevis connection using the adapter link. Insensitive to dirt owing to the sealed body. Connecting bolt and tensioning sleeve are pre-assembled. The BGR 500/DGUV-Regel 100-500 stipulates that lifting means never be used while in a twisted condition. This requirement is automatically met by the VWA because of the integrated ball bearing.

Hint: Install the VWA in such a way that the bending of the adapter link is not possible while in use. Not suitable for permanent use and swiveling under full load. Avoid bending of the appliance.

## VIP-Swivel connector VWA 22

Artikel-Nr: 7100634

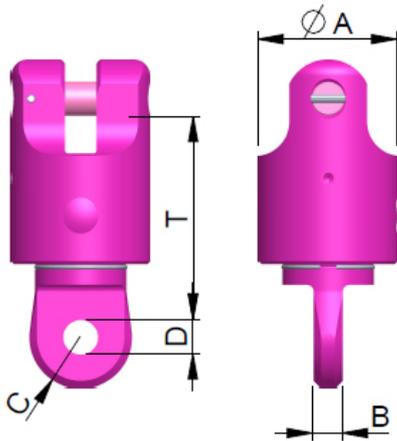

<b>weight</b>	7.77 kg	15.0 lbs
<b>Nominal WLL</b>	20000 kg	44000 lbs
<b>T</b>	147 mm	5-13/16"
<b>A</b>	102 mm	4"
<b>B</b>	23 mm	7/8"
<b>C</b>	37 mm	1-15/32"
<b>D</b>	28 mm	1-1/8"