

VIP-Balancer VW-22

Artikel-Nr: 7904726




VIP-Balancers will be installed into 4-leg sling assemblies (2x 2-leg), to achieve an equal load distribution to all 4 legs. The length tolerances of the single legs will be compensated. You can calculate with 4 load bearing strands if the following criteria are fulfilled (BGR 500/DGUV-Regel 100-500):

- Two 2-leg slings, thereof one sling with a balancer.
- Both 2-leg slings will be attached to one hook (single or double crane hook)
- Symmetrical load spreading
- Max. inclination angle β 45°

Other important RUD specific information and specialities to our VIP-Balancers can be found in the specific user instruction !

VIP-Balancer VW-22

Artikel-Nr: 7904726

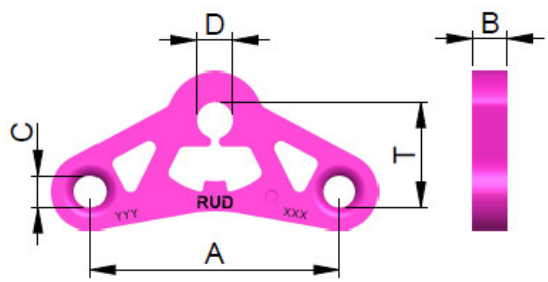

weight	15.39 kg	33.93 lbs
T	150 mm	5-7/8"
A	350 mm	13-3/4"
B	45 mm	1-25/32"
C	46 mm	1-13/16"
D	54 mm	2-1/8"