

## Special WBPG M48 for 200t WLL / 650 mm

Artikel-Nr: 7900383




- With 10 pcs RUD-bolts M48
- **Heavy Duty Generation** WBPG up to 250 t WLL.
- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Detachable suspension ring in the shape of a shackle, for the attachment of common lifting means.**
- RUD bolts with special corrosion protection Corrud-DT are included in delivery and are also available as a spare part. Clear marking at the bolt head: RUD, thread size, batch-no., class of strength.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Special WBPG M48 for 200t WLL / 650 mm

Artikel-Nr: 7900383

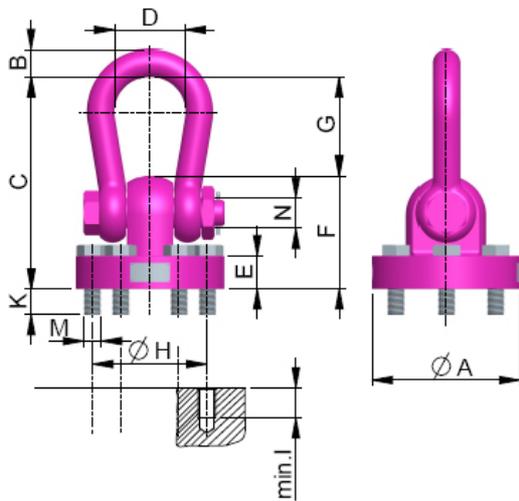

<b>weight</b>	678.00 kg	1494.73 lbs
<b>Nominal WLL</b>	200000 kg	440000 lbs
<b>T</b>	880 mm	34-21/32"
<b>A</b>	650 mm	25-5/8"
<b>B</b>	120 mm	4-3/4"
<b>C</b>	880 mm	34-21/32"
<b>D</b>	290 mm	11-13/32"
<b>E</b>	100 mm	3-15/16"
<b>F</b>	460 mm	18-1/8"
<b>G</b>	426 mm	16-3/4"
<b>H</b>	500 mm	19-11/16"
<b>I</b>	73 mm	2-7/8"
<b>K</b>	71 mm	2-13/16"
<b>M</b>	M48 mm	M48
<b>N</b>	130 mm	5-1/8"